

Dredging Spiral Steel Pipes



Technical Specifications

Type	Dredging Spiral steel pipes
Application	Dredging project
Technics	Double-side spiral submerged ARC welded
Steel grade	Q235, Q345, J55, X65, X70
Connection :	Welding
OD	219MM-3048MM
Thickness :	5MM-28MM
Standard	ASTM / ANSI / DIN / ISO / GB / JIS / BS
Length	3-35m
End	Flanged
Capacity	6000 ton per month
Other usage	petroleum, natural gas ,coal gas ,coal slurry distribution ; tubing and casing , auto transmission , construction , heating , power, piles and other fields .
Remarks	Special design available according to customer's requirement
	All the production process are made under ISO9001:2000 strictly






Production equipment

SAWH螺旋缝埋弧焊钢管生产工艺流程图

SAWH pipe manufacturing flow chart

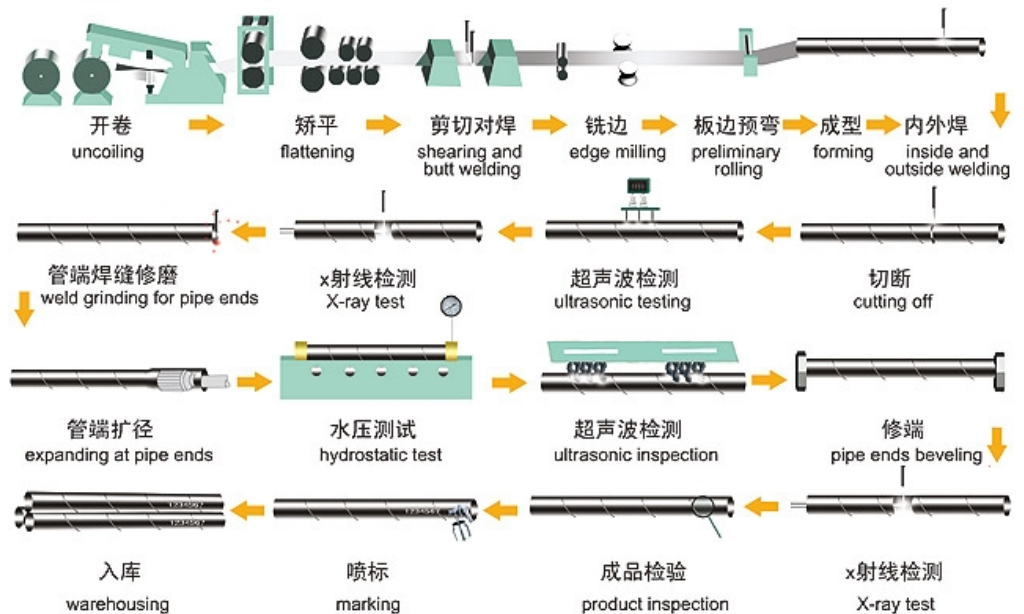

Manufacturing flow chart

Chongqing Hi-Sea Marine Equipment Import&Export Co.,Ltd.

Address: 20-5,General Chamber of Commerce Building, No.2 Hongjin Street, Yubei District, Chongqing, China

Email: machine@hiseamarine.com mitang0708@foxmail.com **Skype:** cncqtang **QQ:** 2278612160

TEL: +86-23-67032301 **FAX:**+86-23-67955123 **Mobile:** +86-18108354610 **Post Code:**401147

Website: www.hiseamarine.com www.chinahisea.com