


平面耐压水密门

FLUSH TYPE WATERTIGHT DOOR

本产品专用于潜艇隔舱围壁，作为水密隔壁上出入口关闭设备。产品具有结构合理，强度高，有双重固紧装置，能双面受压等优点。符合 GB672-76标准。

A SPECIAL ACCESS CLOSING DEVICE FOR SUBMARINE COMPARTMENT BULKHEAD. REASONABLE CONSTRUCTION, HIGH STRENGTH AND DOUBLE FASTENING DEVICE MAKE IT BEAR THE PRESSURE FROM BOTH SIDES. THE DOOR MEET THE REQUIREMENT OF GB672-76 STANDARD.

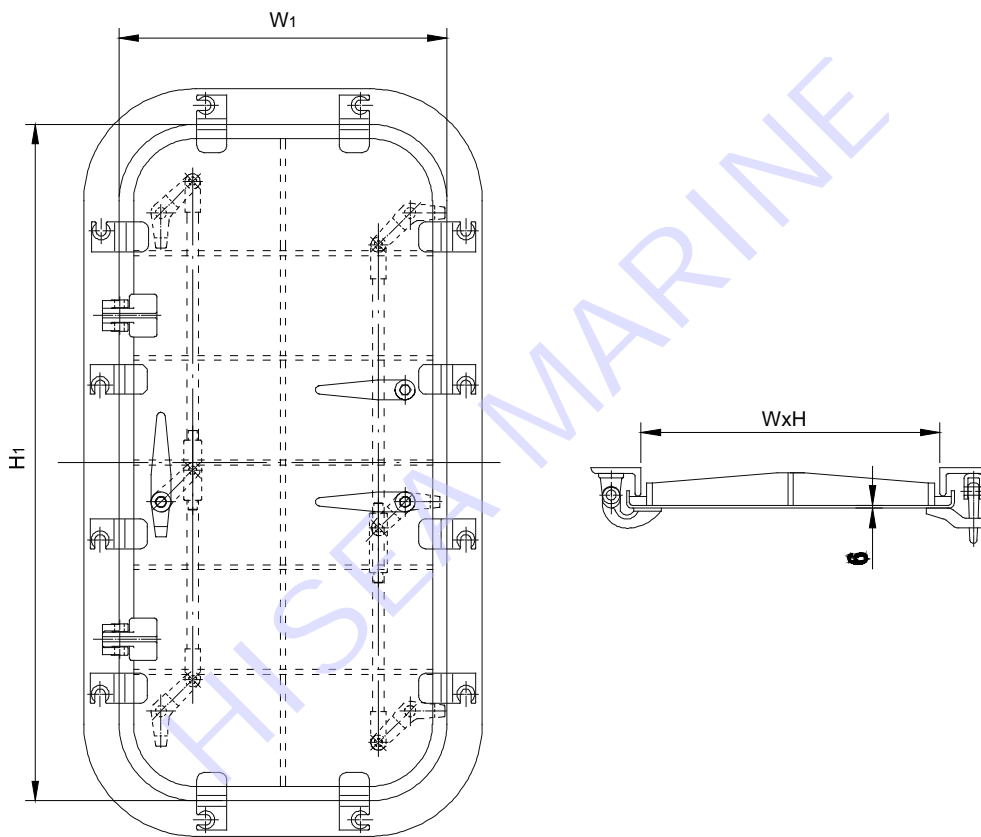

2.规格 SPECIFICATION

通孔尺寸 SIZE OF CLEAR OPENING $W \times H$	门扇外形尺寸 DOOR LEAF OUTLINE $W_1 \times H_1$	重量 WEIGHT kg
600x1300	658x1358	183

标记示例

通孔尺寸为600x1300的右开式平面耐压水密门:

AY600x1300 262.30HS01-00