

钢质遥控水密防火门


A-60 STEEL FIRE PROOF WATERTIGHT REMOTE CONTROL DOOR

钢质遥控水密防火门用于舰船的舵机舱和机舱的水密隔壁上，同时也用于弹药库和一些重要物品存储室等。该产品能满足：1987年钢质海船入级与建造规范规定，国际海事组织（IMO）《耐火试验程序》附件1（FTPL）第三部分及修正后的《1974年海上人命安全公约》（规范）。

STEEL REMOTE CONTROL WATERTIGHT FIRE PROOF DOOR IS NORMALLY USED ON WATER-TIGHT WALL OF ENGINE ROOM AND FOR STEERING GEAR ROOM ON WARSHIP AND ALSO FOR STORE OF GUNNER AND PROVISION.


THIS DOOR COULD MEET THE REQUIREMENT OF ZC 1987. THE REQUIREMENTS OF ANNEX1. (FTPL)PARTS 3 OF IMO AND SOLAS 1974 AMENDED.

1、钢质遥控水密防火门 STEEL REMOTE CONTROL WATERTIGHT FIRE PROOF DOOR

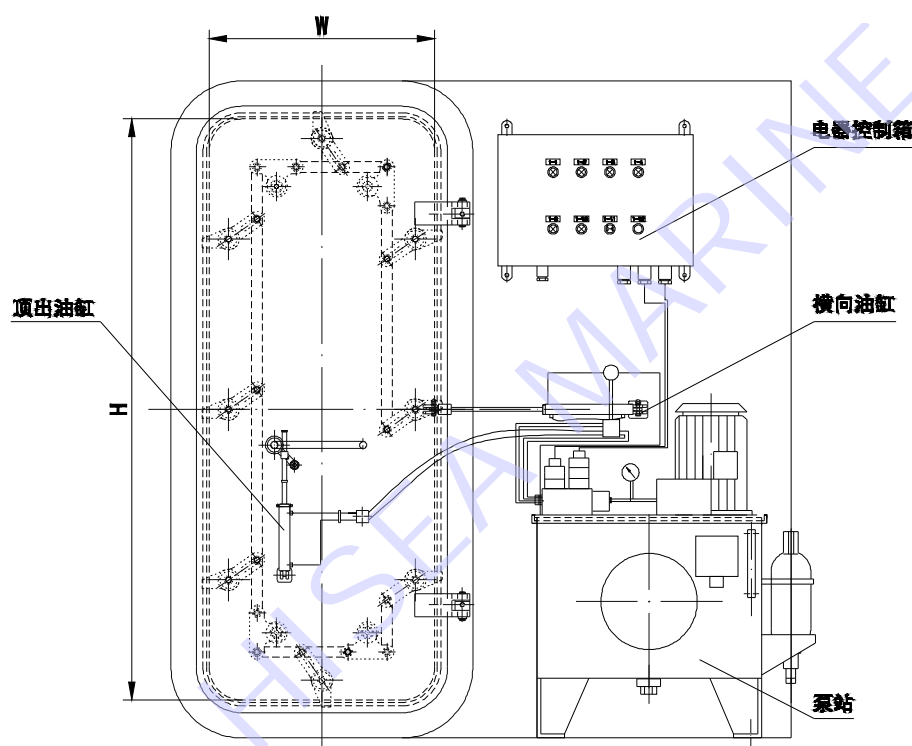

2、规格 SPECIFICATION

规格号 CODE OF SPECIFI- CATION	通孔尺寸 SIZE OF CLEAR OPENING H×W×R	门扇外形尺寸 SIZE OF DOOR LEAF H ₁ ×W ₁ ×R ₁	围壁开口尺寸 OPENING SIZE OF WALL H ₂ ×W ₂ ×R ₂	重量 (kg) WEIGHT
1460	1400×600×R100	1458×658×R129	1500×700×R150	222.8
1560	1500×600×R100	1558×658×R129	1600×700×R150	235.7
1660	1600×600×R100	1658×658×R129	1700×700×R150	248
1670	1600×700×R100	1658×758×R129	1700×800×R150	262.4
1680	1600×800×R100	1658×858×R129	1700×900×R150	276.7
1690	1600×900×R100	1658×958×R129	1700×1000×R150	295.5
1890	1800×900×R100	1858×958×R129	1900×1000×R150	316.7

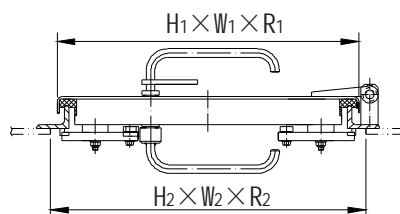

标记示例

通孔尺寸为1600x600 门扇厚6mm，
右外开式，钢质遥控水密防火门
钢质遥控水密防火门 STEEL REMOTE
CONTROL WATERTIGHT PROOF DOOR
1600x600-6 RO 262.11HS12-00