


# 钢质隔音阻气门


## STEEL SOUNDPROOF AIRTIGHT DOOR

适用于机舱控制室等部位

USED FOR ENGINE CONTROL ROOM

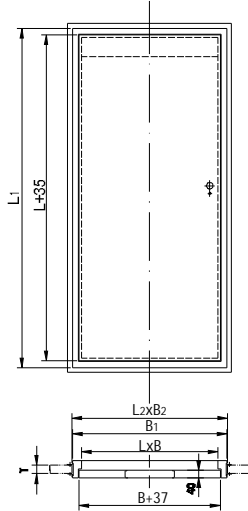

不带窗  
WITHOUT WINDOW

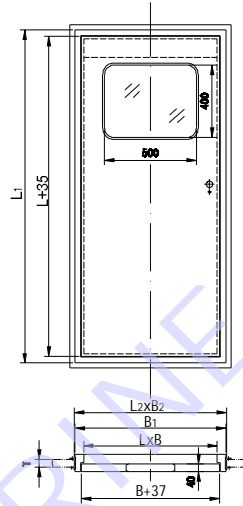

带双层窗  
WITH DOUBLE WINDOW

类型 TYPE	通孔尺寸 SIZE OF CLEAR OPENING LXB	门框尺寸 SIZE OF DOOR FRAME L1XB1	围壁开孔 SIZE OF WALL OPENING L2XB2	D ≥ 80	开向 OPENING DIRECTION	重量 WEIGHT Kg
A	1650X600	1743X693	1750X700	T+40	左外 Lo 右外 Ro 左内 Li 右内 Ri	68
	1750X700	1843X793	1850X800			73
AZ	1650X800	1743X893	1750X900			73
B	1650X600	1743X693	1750X700			81.5
	1750X700	1843X793	1850X800			86.5
BZ	1650X800	1743X893	1750X900			89.9
C	1650X600	1743X693	1750X700			81.5
	1750X700	1843X793	1850X800			86.5
CZ	1650X800	1743X893	1750X900	85		

A	不带窗 WITHOUT WINDOW
AZ	带双层窗 WITH DOUBLE WINDOW
B	不带窗 WITHOUT WINDOW
BZ	带双层窗 WITH DOUBLE WINDOW
C	不带窗 WITHOUT WINDOW
CZ	带双层窗 WITH DOUBLE WINDOW
A AZ	单层壁 SINGLE WALL
B BZ	双层壁 USD FOR DOUBLE WALL
C CZ	三层壁 USD FOR THREE WALL

### 标记示例

通孔尺寸为1750x700mm,框深D为100左外开AZ型钢质隔音阻气门  
 钢质隔音阻气门STEEL SOUNDPROOF AIRTIGHT DOOR  
 AZ1750x700-100 LO CB\*3217-84