


# 钢质防火气密风雨密门 ( A-0级 )

## STEEL WEATHER/GAS TIGHT FIRE DOOR(A-0)

适用于船舶集体防护与集体防护区的界面上或集体防护与外界的界面壁上，具有外形美观，开闭轻便，快捷等优点。

USED ON THE INTERFACE BETWEEN COLLECTIVE PROTECTION AND COLLECTIVE PROTECTION AREA OR ON THE INTERFACE BETWEEN COLLECTIVE PROTECTION AND OUTSIDE FOR WARSHIP AND CIVIL SHIPS. LOW NOISE, GOOD APPEARANCE, FLEXIBLE OPERATION.

### 1. 结构型式 TYPE

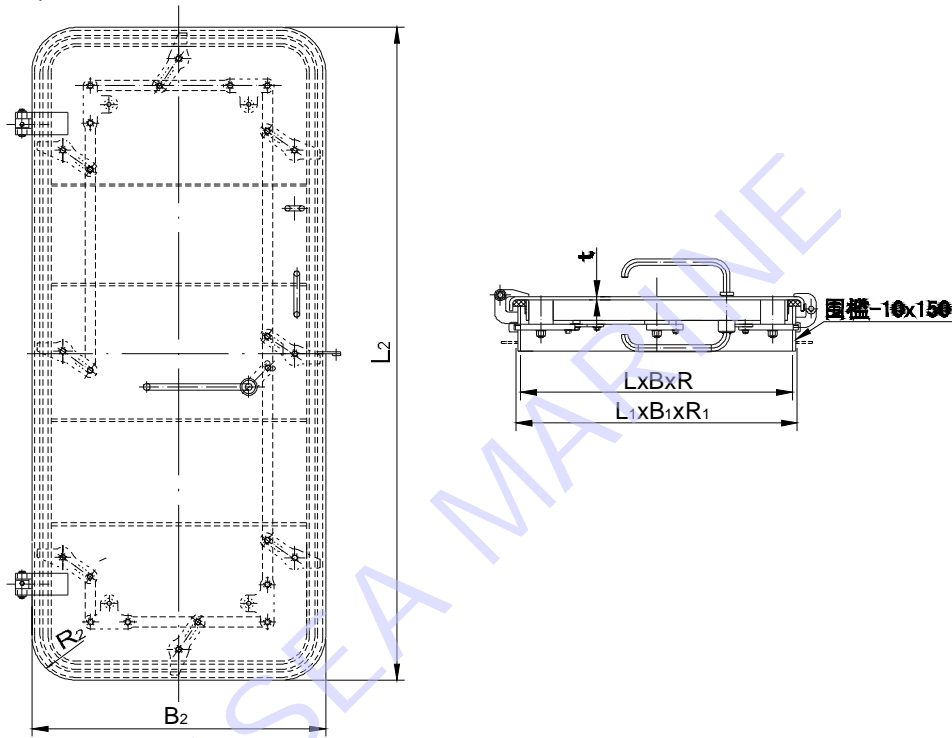

### 2. 规格 SPECIFICATION

通孔尺寸 SIZE CLEAR OPENING LxBxR	围壁开孔尺寸 OPENING SIZE OF WALL L1xB1xR1	门扇尺寸 DOOR LEAF SIZE L2xB2xR2	门扇厚度 (t) THICKNESS OF DOOR LEAF	重量 (kg) WEIGHT
600x1500xR100	624x1524xR112	666x1566xR133	8	147
700x1500xR100	724x1524xR112	766x1566xR133	8	160
800x1500xR100	824x1524xR112	866x1566xR133	8	171
600x1600xR100	624x1624xR112	666x1666xR133	8	155
700x1600xR100	724x1624xR112	766x1666xR133	8	167
800x1600xR100	824x1624xR112	866x1666xR133	8	180
600x1700xR100	624x1724xR112	666x1766xR133	8	161
700x1700xR100	724x1724xR112	766x1766xR133	8	174
800x1700xR100	824x1724xR112	866x1766xR133	8	187

#### 标记示例

通孔尺寸为1600x  
600门扇厚度为8mm，  
右外开A-0级钢质防火  
气密风雨密门

1600x600-8

262.25HS12-00