


Torispherical heads DIN 28011

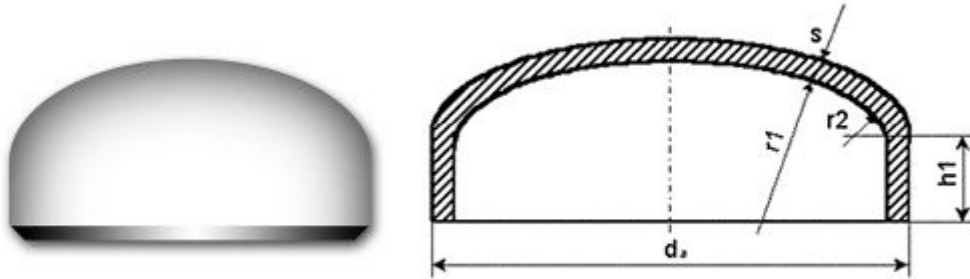

Material

RSt37-2, H11, 15Mo3, 13CrMo44, 10CrMo910, 1.4541, 1.4571

Specification

DN	da	r1	r2	s	h1	kg
20	26,9	26,9	2,7	3,0	11,0	0,06
	30,0	30,0	3,0	3,0	11,0	0,06
25	31,8	31,8	3,2	3,0	11,0	0,07
	33,7	33,7	3,4	3,0	11,0	0,07
32	38,0	38,0	3,8	3,0	11,0	0,08
	42,4	42,4	4,2	3,0	11,0	0,08
	44,5	44,5	4,5	3,0	11,0	0,1
40	48,3	48,3	4,8	3,0	11,0	0,11
	51,0	51,0	5,1	3,0	11,0	0,13
	57,0	57,0	5,7	3,0	11,0	0,15
50	60,3	60,3	6,0	3,0	11,0	0,17
	63,5	63,5	6,4	3,0	11,0	0,17
65	70,0	70,0	7,0	3,0	11,0	0,21
	76,1	76,1	7,6	3,0	11,0	0,25
80	82,5	82,5	8,3	3,0	11,0	0,29
	88,9	88,9	8,9	3,0	20,0	0,32
	101,6	101,6	10,0	4,0	20,0	0,51
100	108,0	108,0	11,0	4,0	20,0	0,61
	114,3	114,3	11,0	4,0	20,0	0,66
	127,0	127,0	13,0	4,0	20,0	0,78
	125	133,0	133,0	13,0	4,0	20,0

	139,7	139,7	14,0	4,0	20,0	0,96
	152.4	152.4	15.0	4.0	20.0	1.32
150	159.0	159.0	16.0	5.0	20.0	1.40
	168.3	168.3	17.0	5.0	20.0	1.70
175	177.8	177.8	18.0	5.0	20.0	1.80
	193.7	193.7	20.0	5.0	20.0	2.10
200	219.1	219.1	22.0	6.0	25.0	3.30
250	244.5	244.5	25.0	6.0	25.0	4.00
	273.0	273.0	28.0	6.0	25.0	4.80
300	323.9	323.9	32.0	7.0	25.0	7.60
350	355.6	355.6	36.0	8.0	30.0	11.00
400	406.4	406.4	41.0	8.0	30.0	14.10
450	457.2	457.2	46.0	8.0	30.0	17.40
500	508.0	508.0	51.0	10.0	35.0	26.30
	559.0	559.0	56.0	10.0	35.0	31.40
600	610.0	610.0	61.0	10.0	35.0	36.90
	660.0	660.0	66.0	10.0	35.0	42.80
700	711.0	711.0	71.0	8.0	35.0	39.50
	762.0	762.0	76.2	10.0	35.0	56.00
800	813.0	813.0	81.0	10.0	35.0	64.00