

Tapered Floating Hose



Tapered floating hose is used in THSD Dredging Project, with dredgers for silt/gravels conveyance. The suitable conveyance matters are usually mud, clay, fine sand, fine-mid sand and so on. The suitable working temperature is from -20°C to +50°C.

This type of hose is suitable to form dredging pipelines working under impact from huge sea waves for its lower barycentre, impact withstand able capability, less specific gravity, reasonable configuration, easy and convenient installation and transportation.


Technical Specifications

mm	300	350	400	450	500	550	600	650	700	750	800	850	900	950
inch	12	14	16	18	20	22	24	26	28	30	32	34	36	38

Note: Other technical parameter can be made according to the client's requirement.

Tapered floating hose features:

1. Easily install,flexible abrasion and bending resistance
2. Long working life
- 3 Good technical support

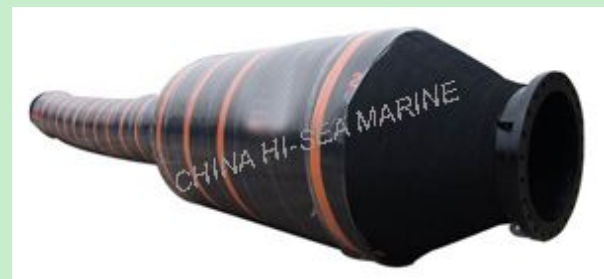

DN800 Tapered Floating Hose

Chongqing Hi-Sea Marine Equipment Import&Export Co.,Ltd.

Address: 20-5,General Chamber of Commerce Building, No.2 Hongjin Street, Yubei District, Chongqing, China

Email: machine@hiseamarine.com mitang0708@foxmail.com **Skype:** cncqtang **QQ:** 2278612160

TEL: +86-23-67032301 **FAX:** +86-23-67955123 **Mobile:** +86-18108354610 **Post Code:**401147

Website: www.hiseamarine.com www.chinahisea.com