



High Pressure Dredge Pump

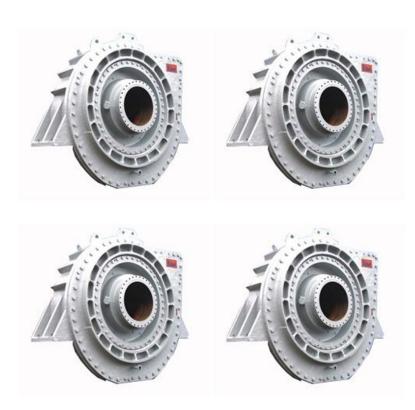

Pump Features and Performance:

- 1. Firm design, high-efficiency and durable, it's suitable to handle general projects, civil engineering and high head drain.
- 2. The impeller and suction casing over are composed of Chromium-Mu, and design complete, it have resistance to abrasion and high efficiency.
- 3. The motor accord with ICE IP68 and F insulation standard.
- 4. The pump uses SIC material of dual mechanical seal and high-thermo enduring lubricated bead bearing.
- 5. The cooling system of pump are whole-water cover or half-water cover design, it dispel the heat fast, cooling result well.
- 6. The pump with high-efficiency motor suit high-low head exchange with changing impeller. The pump moves convenience, suit to drain off water and mud at various situations.
- 7. The pump have inner protector, can protect motor from exceed temperature damage to extend the using period.

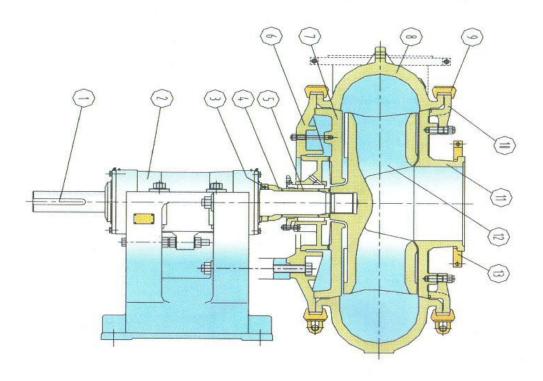

1st, axis 2nd, bracket 3rd, the impeller disassembles the link 4th, localization element 5th, seals the module 8th, pump body 9th, card belt 10th, pump cover 11th, front the guard shield 12, the impeller 13, starts out from opposite directions folio the flange



High Pressure Dredge Pump Application:

- I. The special construction, the bridge, the harbor, the river, the civil engineering drain off water using.
- 2. The sand graduated field, the cement depot, and the kiln industry sewage removes.
- 3. The sedimentation pool, organic sewage, dirt mud discharges.
- 4. The water of underground, subway, building foundation, underground spring discharges.
- 5. The water accumulation of civil engineering, spring water, sewage, the basement, the concave land discharge.





Chongqing Hi-Sea Marine Equipment Import&Export Co.,Ltd.

Address: 15-1, Jinshan Matrix A, Saidi Ro., New North Zone, Chongqing, China ,401122

Email: machine@hiseamarine.com mitang0708@foxmail.com Skype: cncqtang QQ: 2278612160

Website: www.hiseamarine.com www.chinahisea.com