


气密门

GASTIGHT DOOR

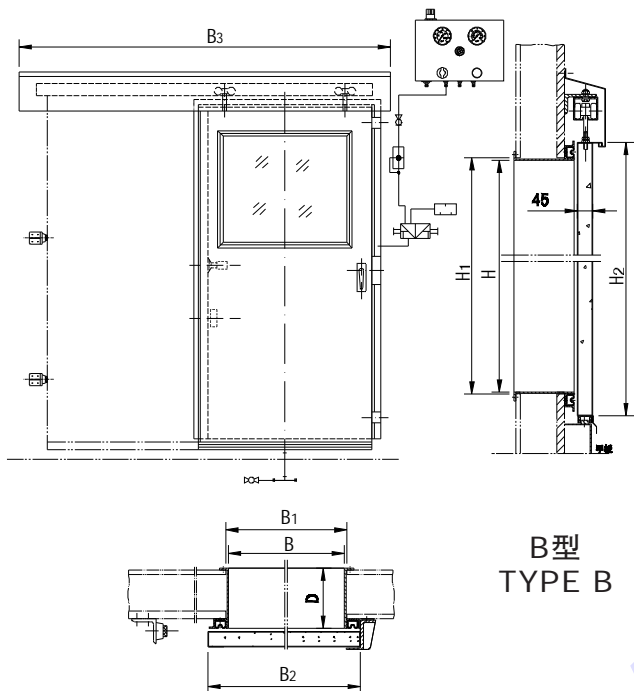

B型
TYPE B

通孔尺寸 SIZE OF CLEAR OPENING H × B	围壁开口 SIZE OF WALL H1 × B1	外形尺寸 SIZE OF DOOR H2 × B2	滑轨长 SLIDE WAY LENGTH B3	门框深 DEPTH OF FRAME D	重量 WEIGHT kg	
					不锈钢 N	铝合金 L
1700 × 750 R100	1710 × 760 R105	1850 × 900	1950	100	151	111
					163	117
					176	123
1700 × 900 R100	1710 × 910 R105	1850 × 1050	2100	100	164	119
					176	125
					189	131
1800 × 750 R100	1810 × 760 R105	1950 × 900	1950	100	155	114
					167	120
					180	126
1800 × 900 R100	1810 × 910 R105	1950 × 1050	2100	100	168	122
					180	128
					193	134
1800 × 900 R100	1810 × 1010 R105	1950 × 1150	2200	100	177	128
					189	134
					202	140


标记示例

通孔尺寸为1800 × 900mm，门框深200mm，B型滑移式充气密封条密封，左开不锈钢气密门：

气密门GASTIGHT DOOR

BL 1800 × 900 × 150L CB/T3722-1995

通孔尺寸 SIZE OF CLEAR OPENING H × B	围壁开口 SIZE OF WALL H1 × B1	外形尺寸 SIZE OF DOOR H2 × B2	滑轨长 SLIDE WAY LENGTH B3	门框深 DEPTH OF FRAME D	重量 WEIGHT kg	
					不锈钢 N	铝合金 L
1700 × 750 R100	1785 × 835 R105	1835 × 830	1950	100	153	113
					165	119
					178	125
1700 × 900 R100	1785 × 985 R105	1835 × 980	2100	100	166	121
					178	127
					191	133
1800 × 750 R100	1885 × 835 R105	1835 × 830	1950	100	157	116
					109	122
					182	128
1800 × 900 R100	1885 × 985 R105	1935 × 980	2100	100	170	124
					182	130
					195	136
1800 × 1000 R100	1885 × 1085 R105	1935 × 1080	2200	100	179	130
					191	136
					204	142

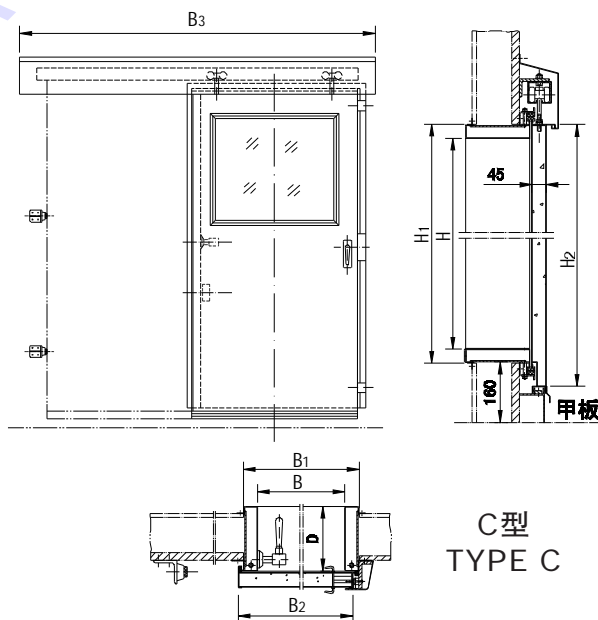

C型
TYPE C

标记示例

通孔尺寸为1700 × 750mm，门框深100mm，C型滑移式机械压夹密封，右开(R)不锈钢气密门：

气密门GASTIGHT DOOR

CR 1700 × 750 × 100R CB/T 3722-1995